

# OR6 Series Outdoor Rock Speaker User's Installation Guide

## Outdoor Simulated Rock Speaker 6.5" Dual Voice Coil Woofer Dual .75" Silk Dome Tweeter Stereo or Mono Input

**Make your Garden and Landscape "Come Alive" with the Most Realistic Rock Speakers on the Market!**

Our Rock Speakers are "Heard But Not Seen" because they resemble real rocks. Even the grill blends in to the rock. The lifelike OR6 Rock Speakers have built-in designed robust high fidelity sound that is demanded in outdoor environments. They are great around the spa to provide a tranquil setting yet can deliver enough power for your teenager's pool party.

The materials in both the enclosure and the speaker were carefully selected to create a rock that is totally weatherized. It can withstand sun, rain, heat, cold, fog, and coastal dew. In addition, the unit comes with an "eye" bolt to deter theft.

The OR6 is a single stereo, stand alone speaker, with dual voice coils and dual tweeters that deliver both left and right sound from one package. It can also be used in conventional stereo application with two separate speakers. In the stereo mode bridge the two speaker leads. No need to stock two separate models. This is one speaker for two applications.

The color choices are Tennessee Granite and California Sandstone.



Electrical connection is made by four color coded leads.

With our limited 5 year warranty you are assured years of superior trouble free operation.



SPECIFICATIONS Outdoor Rock Speakers	OR6G	OR6S
Driver with Dual Voice Coils	6.5" Mica Filled Polypropylene	6.5" Mica Filled Polypropylene
Dual Tweeters, ¾" (19mm) Dome	Dual Silk Dome	Dual Silk Dome
Frequency Response	47Hz-20kHz	47Hz-20kHz
Power handling	5-125 Watts	5-125 Watts
SPL @ 1 Watt/1 meter	90db	90db
Impedance: 8 ohm Nominal , 4 ohm Bridged	Fixed Crossovers	Fixed Crossovers
Approximate Height X Width X Depth	12"(304m) X 14"(356mm) X 11"(279mm)	12"(304m) X 14"(356mm) X 11"(279mm)
Color	Tennessee Granite	California Sandstone

Part Number	92043 OR6G Tennessee Granite 92068 OR6S California Sandstone
Manual URL	<a href="http://www.currentaudio.com">www.currentaudio.com</a>
Accessories	Volume Control ZL25R, ZL50S



Specifications subject to change without notice.

[www.currentaudio.com](http://www.currentaudio.com)  
©2009 Current Audio LLC  
1830 John Towers Avenue El Cajon, CA 92020 Sales 866-927-7181

OR6 RPA 072210

# OR6 Series Outdoor Rock User's Installation Guide

## Packaging and Enclosed Parts

Please inspect your pack for damaged or missing parts. Notify your supplier if any discrepancies occur.


The OR6 Rock Speakers are packaged one to a box and sold as each.

At the bottom of the speaker are two 2 conductor cables for stereo or mono hook-up. Also, two 1/4" threaded holes to attach "eye" bolts for theft deterrent.

## Install

1. Decide if you want standard two speaker separate stereo sound or one speaker with both Left and Right stereo sound. The OR6 can do both.
2. Chose locations for your speakers. If using two separate speakers, keep in mind your "sweet spot" the area where you will spend most of your time.
3. Choose your wiring method, PVC conduit or direct burial cable. 14 or 12 gauge low voltage Malibu direct burial cable works fine and is readily available.
4. Bury your conduit or wire 18" below grade to prevent damage by tillers or shovels when planting. Prewire before hardscape concrete.
5. Carefully identify Left and Right cables at both ends. For proper phasing identify the (+) and (-) on each cable.
6. Insure there is enough room to place the OR6 Rock after concrete is finished.
7. If theft is a problem use a 3' green fence post pounded into the ground and then fasten to an "eye" bolt via a steel braided cable. (Not Supplied)
8. Connect the wires as shown on the OR6 Wiring Scheme. Use Ideal #62 Weather Proof Wire Connector or equivalent. (Not Supplied) The silicone-based sealant protects against moisture and corrosion. Connecting all four wires to the amp Left and Right will give stereo sound from one speaker.
9. If using as stereo with two separate speakers, bridge both speaker cables. (Connect both Red and Black wires in parallel).
10. Connect the amplifier Left wire to the to the bridged red and black cables of the designated LEFT OR6. Observe polarity.
11. Connect the amplifier Right wire to the to the bridged red and black cables of the designated RIGHT OR6 speaker. Observe polarity.
12. Before connecting the wires to the amplifier check the for proper connection and make sure there are no shorts.
13. If OK then connect to amplifier.
14. If a wall is directly behind the OR6 you can face the grill into the wall. This will wash the wall with sound and further disguise the OR6.
15. If using a volume control I suggest placing it inside the house for easy control and to protect it from the elements.

Caution: Do Not hook-up more then one stereo pair to a zone. In the Bridged stereo mode the impedance is lowered.

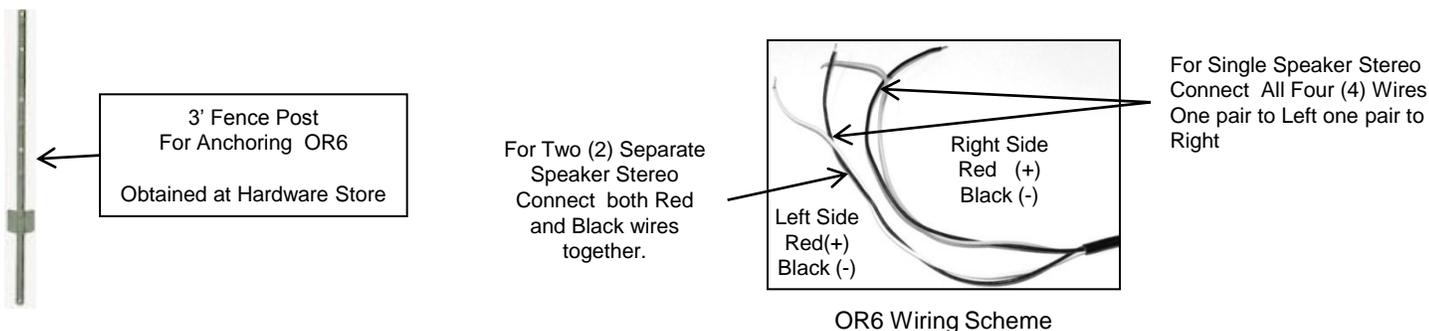

### Limited 5 Year Warranty

Current Audio, LLC speakers and accessories are warranted to be free from defects in materials and or workmanship to the original retail purchaser for a period of 5 years provided the equipment was purchased and installed from a Current Audio, LLC Authorized Dealer.

In the event of defective materials and or workmanship, Current Audio, LLC will, without charge, repair or replace, at its option, the defective product. In order to make claim under this Warranty and to obtain performance of any obligation under warranty, please contact Current Audio. Instructions will be given on how to return the defective product to Current Audio. Returned products must be shipped prepaid. Proof of purchase must be provided with the product.

The Warranty does not apply to damage not resulting from defective materials and or workmanship while in the possession of the original consumer or due to unreasonable use by the original consumer, which includes but not limited to improper installation, negligence, unauthorized repair or modification, aesthetic deterioration from the environment. Products purchased by unauthorized sources will void the warranty and not be honored.

Current Audio, LLC is not liable for any incidental or consequential damages, so the above limitations or inclusion may not apply to you. This warranty gives you specific legal rights, and you may have other rights, which vary from state to state within the United States.